

EX-7 series

HITACHI

Reliable solutions

EX5600



## HYDRAULIC EXCAVATOR

**Model Code:** EX5600-7 (Fuel Consumption Optimization)  
**Engine Rated Power:** Cummins: 2 x 1 119 kW (1 520 PS, 1 500 HP)  
MTU: 2 x 1 150 kW (1 563 PS, 1 542 HP)  
**Operating Weight:** Cummins Loading Shovel  
: 541 000 kg (1,192,701 lb.)  
Backhoe: 545 000 kg (1,201,519 lb.)  
MTU Loading Shovel: 549 000 kg (1,210,338 lb.)  
Backhoe: 553 000 kg (1,219,156 lb.)  
**Bucket:** Loading Shovel: ISO 7546 Heaped 2:1  
: 27.0 - 31.0 m<sup>3</sup> (35.3 - 40.5 cu. yd.)  
Backhoe: ISO 7451:2007  
: 34.0 - 38.5 m<sup>3</sup> (44.5 - 50.4 cu. yd.)

**Model Code:** EX5600-7B (Tier 4 Final / EU Stage V)  
**Engine Rated Power:** Cummins: 2 x 1 119 kW (1 520 PS, 1 500 HP)  
MTU: 2 x 1 150 kW (1 563 PS, 1 542 HP)  
**Operating Weight:** Cummins Loading Shovel  
: 544 000 kg (1,199,315 lb.)  
Backhoe: 549 000 kg (1,210,338 lb.)  
MTU Loading Shovel: 549 000 kg (1,210,338 lb.)  
Backhoe: 553 000 kg (1,219,156 lb.)  
**Bucket:** Loading Shovel: ISO 7546 Heaped 2:1  
: 27.0 - 31.0 m<sup>3</sup> (35.3 - 40.5 cu. yd.)  
Backhoe: ISO 7451:2007  
: 34.0 - 38.5 m<sup>3</sup> (44.5 - 50.4 cu. yd.)

**Model Code:** EX5600-7E  
**Power Output:** 2 x 860 kW (1 169 PS, 1 153 HP)  
**Bucket:** Loading Shovel: ISO 7546 Heaped 2:1  
: 27.0 - 31.0 m<sup>3</sup> (35.3 - 40.5 cu. yd.)  
Backhoe: ISO 7451:2007  
: 34.0 - 38.5 m<sup>3</sup> (44.5 - 50.4 cu. yd.)


*Introducing the*  
**NEW EX5600-7**

The Hitachi EX-7 series is borne from sheer engineering excellence, balancing innovation with proven design to deliver industry leading excavators.

With simplified maintenance and a focus on operator comfort, Hitachi offers a productive, durable solution for all mining operations.

Incorporating the latest technologies, systems and safety features, the EX5600-7 delivers unrivaled performance and reliability in its class.



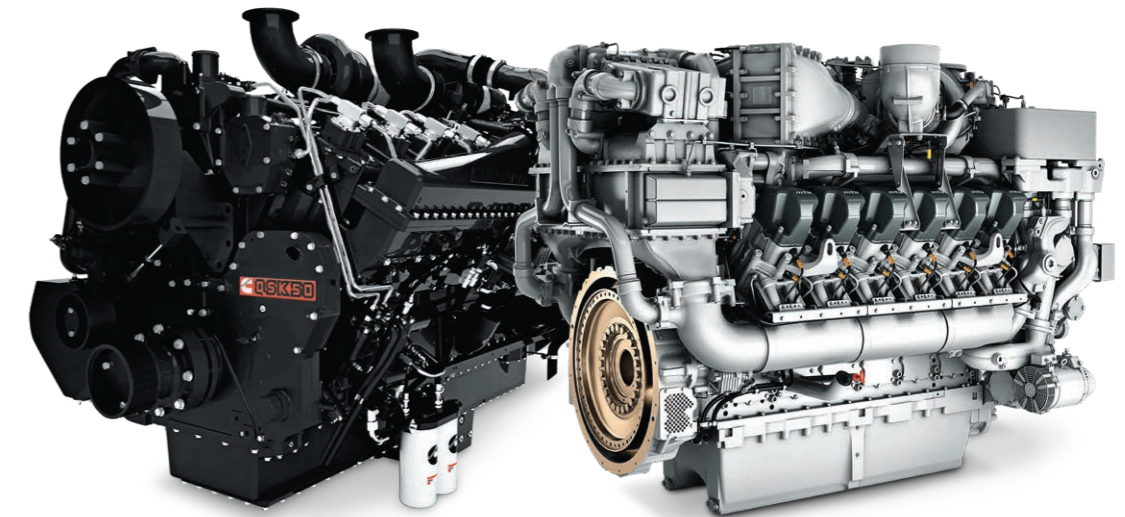

### DIESEL DRIVERS

#### EX5600-7 (FCO)

The EX5600-7 model, equipped with Cummins or MTU FCO\* (Non-Certified) engine that optimizes fuel consumption.

#### CUMMINS

Cummins QSK50, 2 x 1 119 kW (1 520 PS, 1 500 HP)

#### MTU

MTU 12V4000 C33R, 2 x 1 150 kW (1 563 PS, 1 542 HP)

\*FCO: Fuel Consumption Optimization

### ELECTRIC DRIVERS


#### EX5600-7E

The EX5600-7E electric excavator utilizes the Hitachi AC electric motor without the diesel exhaust emissions.

#### HITACHI ELECTRIC MOTOR


Hitachi TFOA-KK, 2 x 860 kW (1 169 PS, 1 153 HP)  
 · 50Hz, 6000V, 6600V\*\*  
 · 60Hz, 6600V, 6900V\*\*

\*\*Please contact hitachi for other specification request




### MAIN PUMP ELECTRIC REGULATORS

Individually controlled hydraulic pumps utilize an electric regulator on each main pump, optimizing engine power and lowering fuel consumption to deliver a more efficient performance.




### HYDRAULIC REGENERATION CIRCUIT

The new flow regeneration valve fitted to the hydraulic system reduces hydraulic pump demand ultimately reducing the power requirements from the hydraulic system and engine, lowering fuel consumption and improving pump life.



### HYDRAULIC OIL COOLER FAN

Redesigned hydraulic oil cooler with variable speed fan requires less power to cool hydraulic oil, resulting in a more reliable hydraulic system with reduced energy demand.



### RADIATOR FAN CLUTCH

The radiator fan clutch and variable speed fan are specifically tailored to the engine cooling requirement, resulting in an optimal cooling system with reduced engine horsepower demand and the added benefit of lowering operation noise.

## designed for SUSTAINABILITY

The Hitachi EX-7 series utilizes the latest advancements in engine and energy optimization technologies to deliver a customized and sustainable machine, while providing a significant reduction in fuel consumption without compromising productivity.

The EX5600-7 offers a selection of engine models, including the choice of emission configurations to meet regulatory requirements, combined with new electronically controlled hydraulic pumps, optimized cooling package and enhanced hydraulic circuits, to provide unparalleled performance and efficiency.

*designed for*  
**PRODUCTIVITY**



Engineered from the ground up with advanced technologies to maximize productivity, the EX5600-7 delivers a reliable solution for all operations.

Embracing the Hitachi design philosophy of balanced reliability and productivity, the EX5600-7 optimizes machine performance, providing a consistent and dependable solution to meet the demands of the mining industry.

**FRONT ATTACHMENT**

With a front attachment design optimized for machine performance, the EX5600-7 can achieve superior productivity under various digging profiles.

The boom and arm are strategically welded, utilizing a full-box section design to evenly distribute stress and provide ease of maintenance.

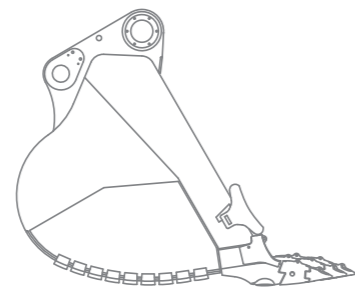

**LOADING SHOVEL**

The Loading Shovel attachment is equipped with an auto-leveling crowd mechanism that controls the bucket at a constant angle. Complete with floating pin and bush, the bucket has been specifically designed to enhance loading capability with a tilt angle that enhances operational efficiency.

**EXCAVATING FORCE**

**Arm crowding force on ground**  
1 520 kN (155 000 kgf, 341,710 lbf)

**Bucket digging force**  
1 590 kN (162 000 kgf, 357,446 lbf)

**BACKHOE**

The Backhoe attachment is designed using computer aided box frame analysis to determine the optimal structure for integrity and longevity. Complete with floating pin and bush, Hitachi buckets are designed to match the geometry of the attachment to maximize productivity.

**EXCAVATING FORCE**

**Arm crowding force on ground**  
1 300 kN (133 000 kgf, 292,252 lbf)

**Bucket digging force**  
1 480 kN (151 000 kgf, 332,717 lbf)





## designed for **SAFETY**

At Hitachi, safety is paramount, that's why safety is a major focus in the new EX-7 series excavators.

Designed and built with improved pathways and handrails, the layout of the EX5600-7 provides for a safer and more maintainable machine. The addition of an on-board inclinometer and the dual isolator switch as standard, deliver a safer working environment than ever before.

### ENGINE STOP SWITCHES

Engine stop switches have been placed in easily accessible areas: four in the engine room, one in the pump room, one in the oil cooler room, and one emergency stop switch in the cab.

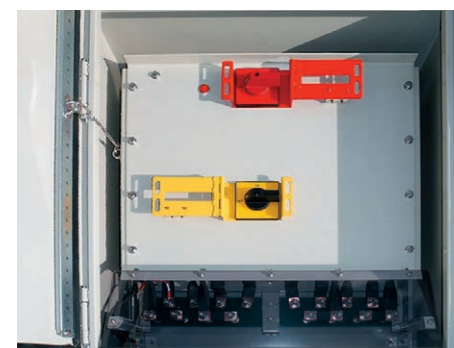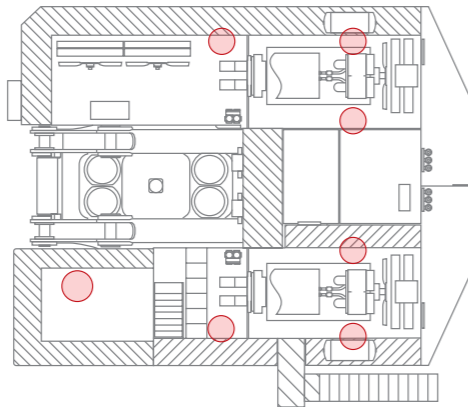

### DUAL ISOLATOR SWITCH

The conveniently located dual isolator switch provides the option to deactivate the engine and battery individually.

When inspections and maintenance are required, the battery isolator provides the benefit of isolating both the positive and negative terminals of the battery to provide a safe working environment. The engine isolator deactivates the engine starter motor, while allowing battery power to the electric system for troubleshooting to enhance safety and maintainability.



### EMERGENCY ESCAPE CHUTE

An escape chute has been added to the side of the cab for use in an emergency. The chute allows evacuees to descend vertically down from the machine, providing a safe and fast route of escape when all other means of exit are blocked.



### ON BOARD INCLINOMETER

The on-board inclinometer assists the operator to work within the safe limits of the machine for optimal performance, with two predetermined safety limits providing extra assurance and confidence. If the first safety limit is exceeded, the operator receives a visual alert prompting them to take corrective action. The alert escalates to an audible alarm if the second safety limit is breached.



### PERIMETER MONITORING CAMERAS (OPTIONAL)


Optional perimeter monitoring cameras offer better visibility of the surrounding area, reducing blind spots for the operator. Cameras are located at the front (2) and rear (2) of the excavator and linked to monitors inside the cab.



### ACCESS AND STAIRWAYS

Anti-slip walkways and the specifically designed handrail system reduce the risk of tripping when maneuvering around the machine, and provide ease of access for operators and maintenance personnel.

Wide, gradual gradient, non-slip hydraulic folding stairs allow for easy and safe access to the machine.

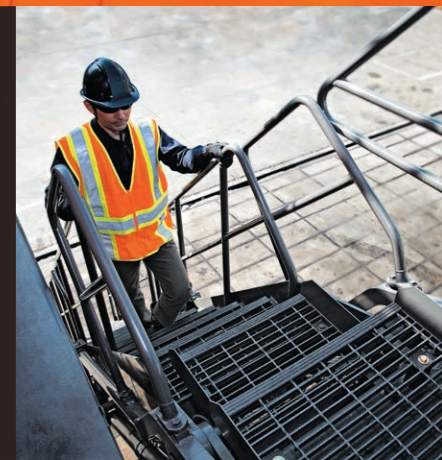

## OPERATOR CABIN

The use of tinted laminated windows to reduce heat, glare and harmful UV rays, and the sound-suppressed cab, further enhance the ergonomic environment, improving operator comfort. OPG top guard level II compliant with ISO 10262:1998 provides secure protection from falling objects, ensuring operator safety.



## designed for OPERATOR COMFORT

The EX5600-7 cabin is designed for a superior operating experience. The ergonomic layout, electronic joysticks, intelligent Multi-Display, air suspension seat and advanced climate control system provide an operating environment conducive to less fatigue and enhanced operator productivity.



### MULTI-FUNCTIONAL DISPLAY

Fitted with an LED back-light to improve clarity and reduce glare, the multi-functional display provides key machine information and performance indicators through use of an integrated dial switch interface.

### ROLL SCREENS

Retractable front and side roll screens provide a more comfortable working environment, protecting the operator from sun glare. Reduced heat buildup in the cab improves the efficiency of the climate controlled air conditioner resulting in a more enhanced operating environment.




### CLIMATE CONTROLLED AIR CONDITIONING

The climate controlled air conditioning within the pressurized cab helps overcome environmental extremes. Optimized filtering of interior and exterior air combined with the new flexi-vent system provides a more personalized and balanced environment to meet the demands of the operator.



### OPERATOR SEAT

Specifically designed for use in the mining industry, the automatic weight-adjusting air suspension seat determines the optimal cushioning effect to match the operator's weight, enhancing comfort and minimizing vibration.



### ELECTRONIC JOYSTICKS


Connected to the machine's microprocessor, the integrated electronic joysticks enable precise and almost effortless operation, minimizing operator fatigue and improving operational performance.

designed for

# EASE OF MAINTENANCE


Hitachi's unique modular design, spacious passageways and work platforms provide clear access for daily maintenance requirements and major component inspections, resulting in safer and simplified maintenance.

The addition of several new innovative features improve the serviceability of the EX5600-7, reinforcing the ease of maintenance that customers have come to expect from Hitachi.

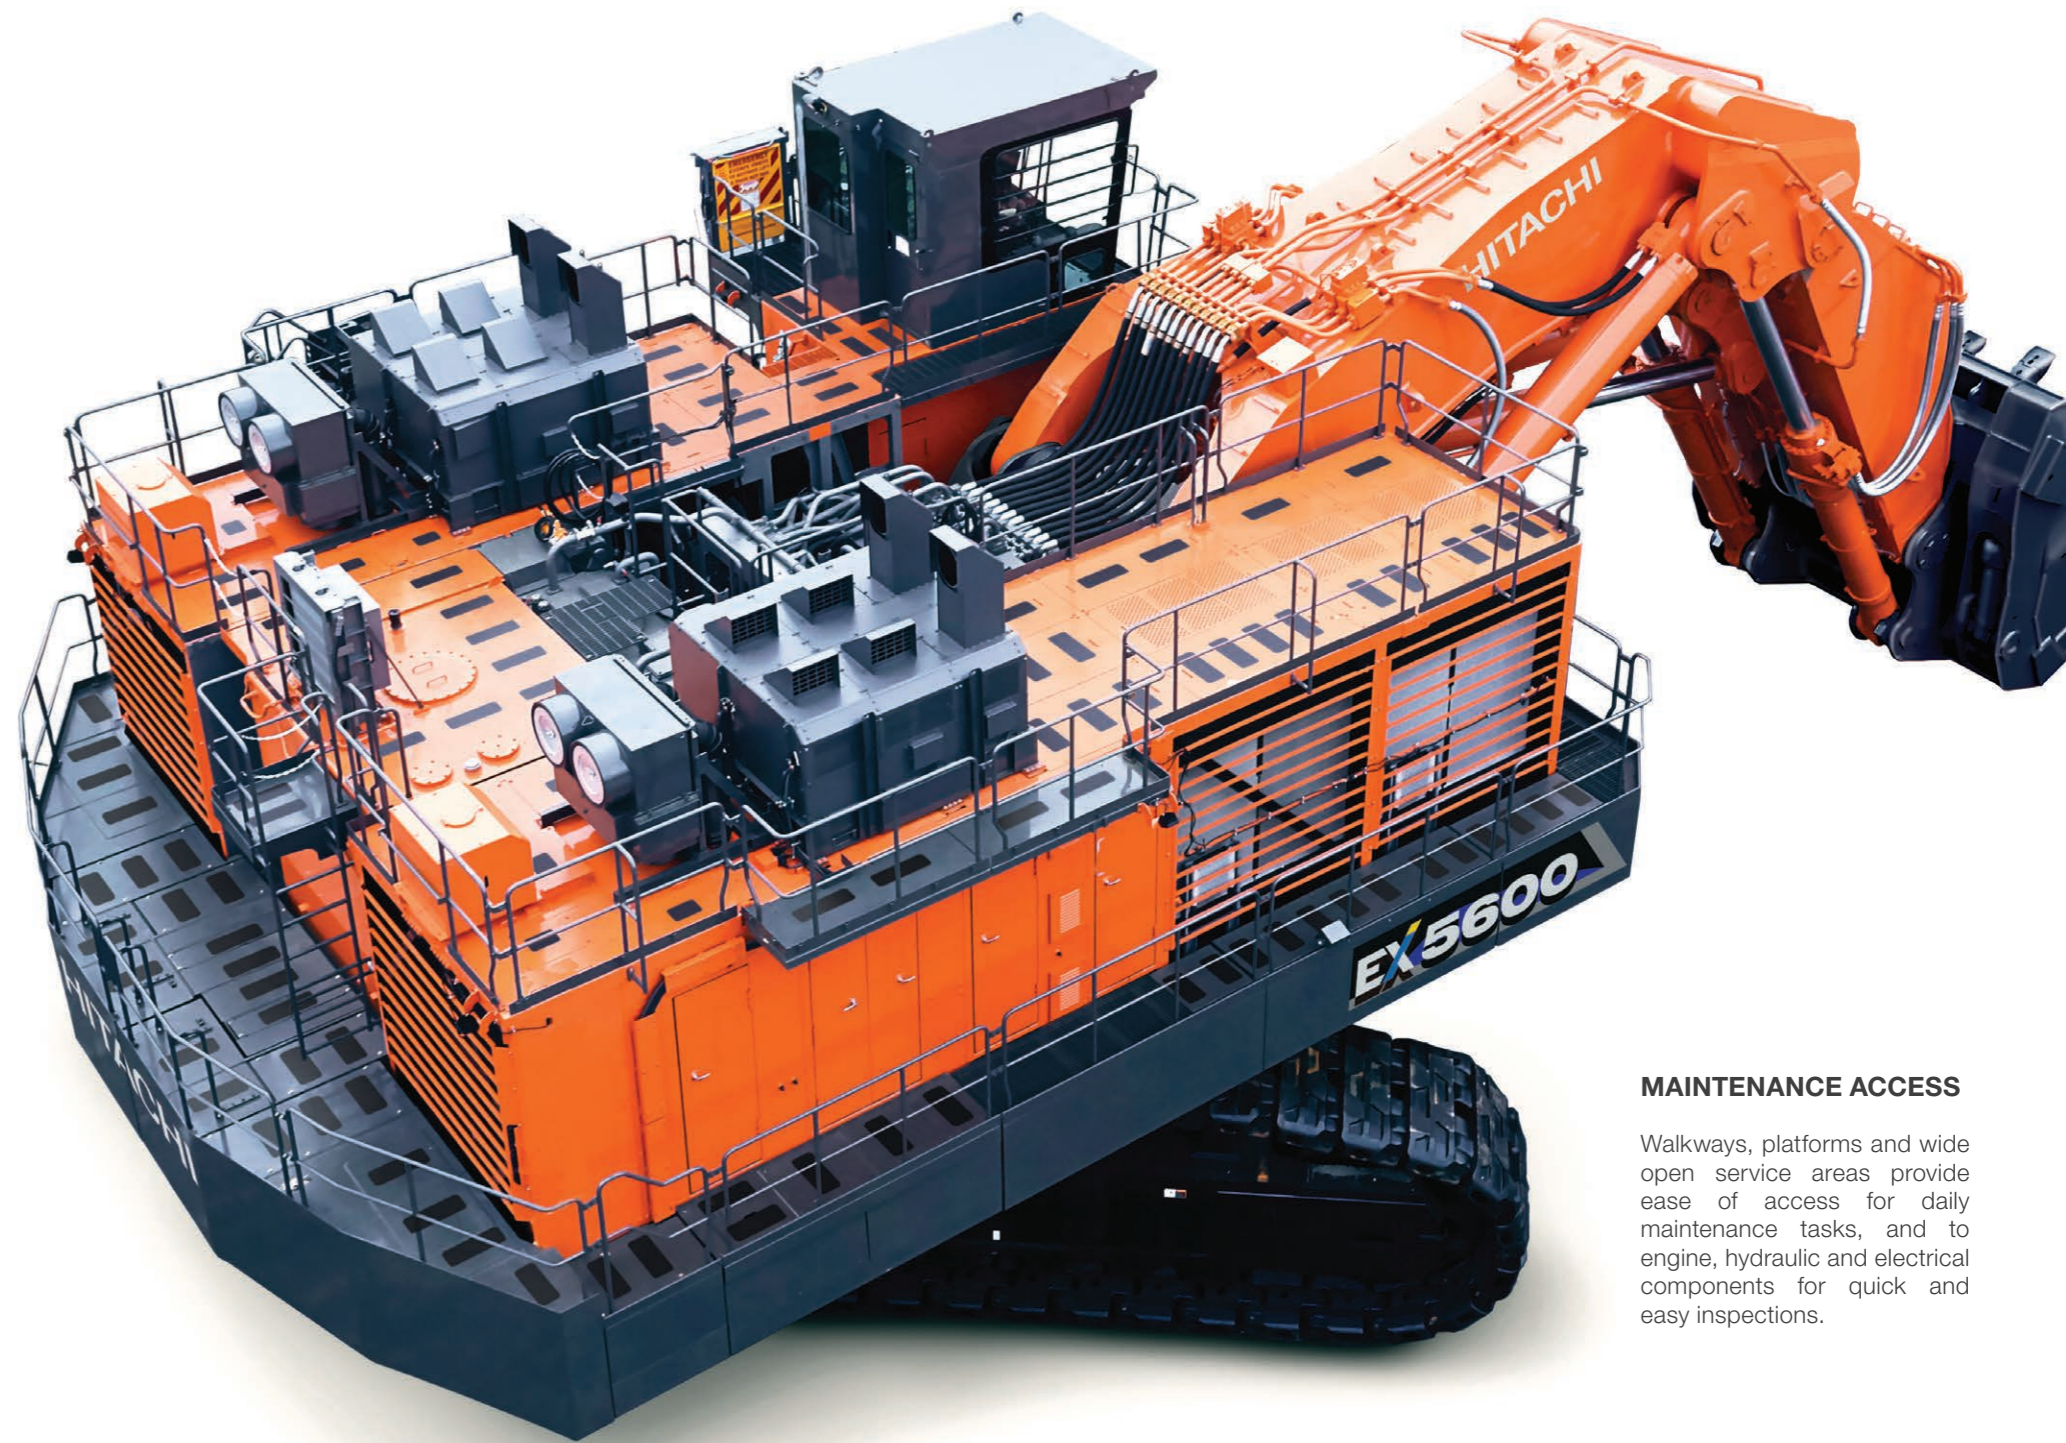

## MAINTENANCE ACCESS

Walkways, platforms and wide open service areas provide ease of access for daily maintenance tasks, and to engine, hydraulic and electrical components for quick and easy inspections.

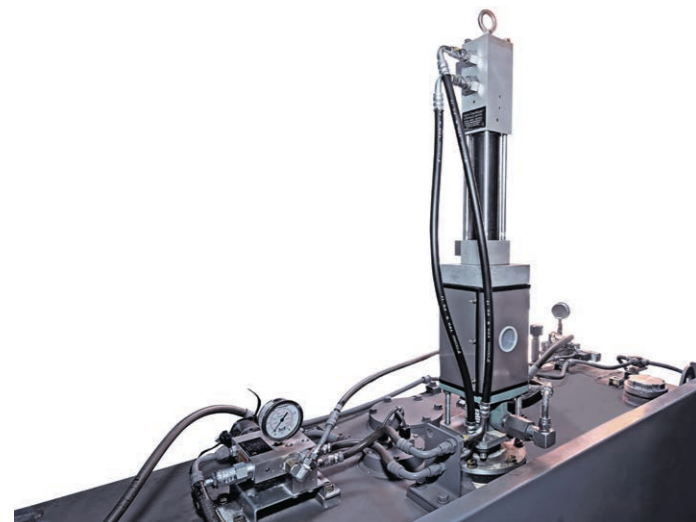


## AUTO-LUBRICATING SYSTEM

Advanced, redesigned auto-lubrication system comes with a 673 L (177.8 gal.) large capacity grease tank, new grease pump, in-line grease filter, breather with filter, grease level indicator in the cab and a provision for fitment of a second grease pump in the lubrication tank, providing a more reliable system for more uptime.

## CENTRALIZED LUBRICATION SYSTEM

The centralized fast-filling system provides easy access from the ground to refill and evacuate lubricants, water, grease and fuel. The fast-filling system can be fitted with an optional quick coupler.

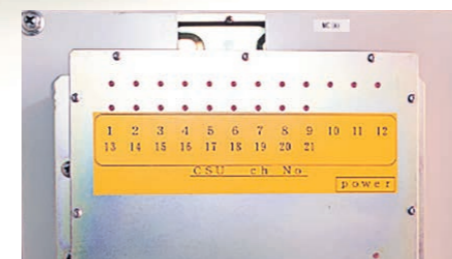

## CONTAMINATION SENSORS

Contamination sensors are located on all main hydraulic pumps to detect any contaminants that may cause damage to the hydraulic system. The sensors alert the operator of potential contaminants and also record the fault code in the Data Logging Unit (DLU) with the capability to remotely advise maintenance personnel.

## LUBRICATION PIPING COVER

A swing circle cover has been added to the outside of the swing bearing, protecting the lubrication piping from debris damage.




## GREASE-LESS CENTER JOINT

The redesigned center joint is self-lubricating utilizing the machine's hydraulic oil, reducing the need for daily maintenance.

*designed for*  
**DURABILITY**

Designed, built and engineered for the mining industry, Hitachi's EX-7 series excavators offer a productive, reliable solution for all operations.

From the rigid box design to the 3D computer assisted FEA analysis, the EX5600-7 utilizes proven engineering philosophies to deliver a more durable machine.

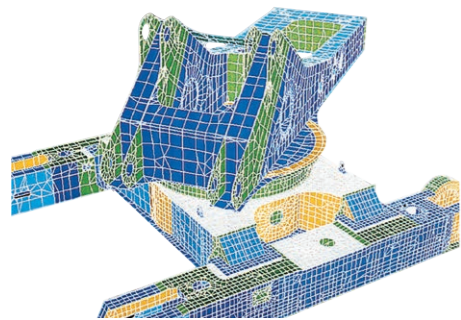


**RIGID BOX DESIGN**

Computer assisted analysis is used to determine the most effective design for frame longevity to withstand the demands of the mining operation.



**CENTER TRACK FRAME**

Hitachi's exclusive center track frame delivers optimal stress dispersion through the use of specifically designed castings to reduce welds in critical high stress areas, ensuring a stronger frame with improved durability and reliability.

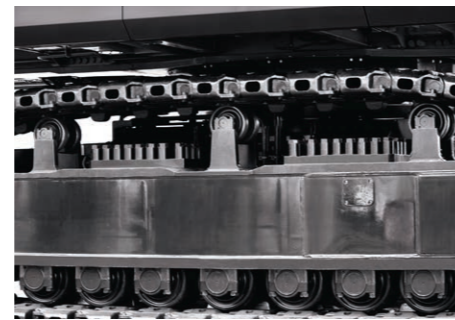

**UPPER ROLLERS**

The EX5600-7 undercarriage has three double-sided pedestal-designed upper rollers on each side of the track frame to maintain track shoe clearance and provide protection from debris buildup, reducing shoe and roller wear for a more reliable solution.



**OIL FILLED ROLLERS & IDLERS**

The oil-filled idlers, and upper and lower rollers eliminate the need for daily lubrication, helping reduce maintenance costs.



**TRACK SHOES**

The proven Hitachi patented track shoe design has been applied to mitigate premature wear of the drive-lugs. Each shoe is induction hardened utilizing Hitachi's unique processes to deliver a superior and more durable solution.



**CENTER FRAME UNDERGUARD (OPTIONAL)**

The newly designed heavy duty guard protects hoses and accumulators located in the track center frame from rocks and debris ingress, providing extra protection and reliability.






**ELECTRONIC CYLINDER STROKE CONTROL**

The new on-board electronic controller receives signals from angle sensors fitted to the boom and arm to control the pump flow rate and cylinder speed, reducing the shock at the stroke end of the cylinder cycle. This new feature improves operator comfort and reduces the impact on the cylinders and structures, increasing reliability and productivity.




*designed for*  
**RELIABILITY**

Evolving from years of operational experience and engineering excellence, the Hitachi EX-7 series of excavators continues to drive innovation within the mining industry. Advanced technology, enhanced durability, improved safety features and operational performance, all combine to make the new EX5600-7 a more reliable mining solution.

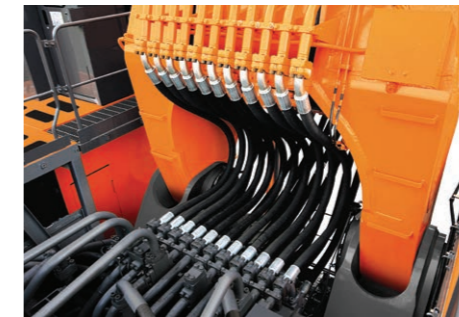

**FRONT ATTACHMENT HOSES**

Hitachi's hose design is based on a cyclic fatigue rate to maximize longevity and improve safety. Front attachment hoses have also been rearranged from the traditional arch style to an underslung configuration, removing the need for clamping, reducing chafing and increasing reliability.

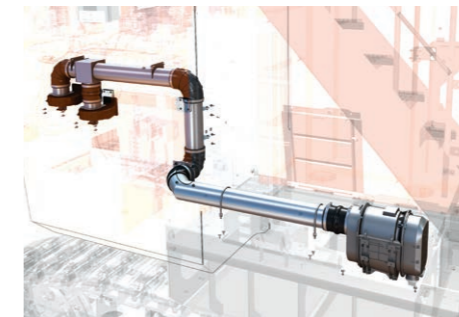

**CAB RISER PRESSURIZER**

A pressurizer system has been introduced to the cab riser to reduce dust infiltration, maximizing the service life of the electronic components and devices located within.



**SOLID CONDUIT WIRE HARNESES**

The introduction of solid conduit harnesses and junction boxes prevents dust and moisture ingress, improving longevity. Electrical harnesses between junction boxes can be replaced individually, ultimately reducing maintenance time and cost.




**OPERATING LIGHTS**

Strategically placed long-life LED working lights provide greater longevity and reliability in night operations.

# designed for INTELLIGENCE

Hitachi's EX-7 excavators connect physical features with digital technologies for seamless and intuitive operation. Extensive onboard sensors, diagnostic tools, real time data and advanced software allow the EX5600-7 to empower personnel with a better understanding of mining operations.



## SATELLITE / GPRS COMMUNICATION (OPTIONAL)

Standard machine information is transmitted daily through either satellite or GPRS (General Packet Radio Service) communication, sending data directly to the Hitachi Global e-Service platform to support the mining operation.

## Globale-Service

Global e-Service is a Hitachi web-based platform that sends vital machine information directly to the customer in an easy-to-understand format.

ANTENNA (GPRS) OR SATELLITE

## WIRELESS INTERFACE (OPTIONAL)

Detailed machine information can be remotely downloaded from the Data Logging Unit (DLU) via the Wireless Interface Unit (WIU), providing vital operational & performance data.



ON-SITE STAFF




INFORMATION CENTER, HITACHI CONSTRUCTION MACHINERY



CUSTOMER




HITACHI CONSTRUCTION MACHINERY GROUP AND DEALERS



FLEET MANAGEMENT SYSTEM



The DLU can be combined with Wenco or another third party fleet management system to provide live operational and performance information, assisting with fleet management.

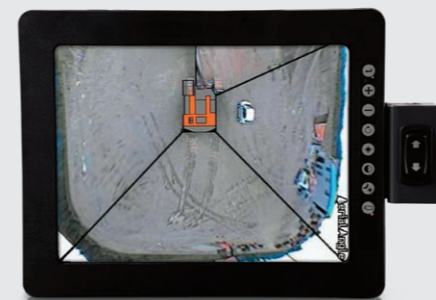


## Aerial Angle (OPTIONAL)

Aerial Angle provides the operator with a real-time continuous birds-eye view around their excavator. Cameras strategically mounted on the machine combine to a single aerial view of the EX5600-7 surroundings. Multiple screen display options can be selected on the cab's 12-inch Aerial Angle monitor for ease of operation.

# SPECIFICATIONS


## WORKING RANGES

### Loading Shovel

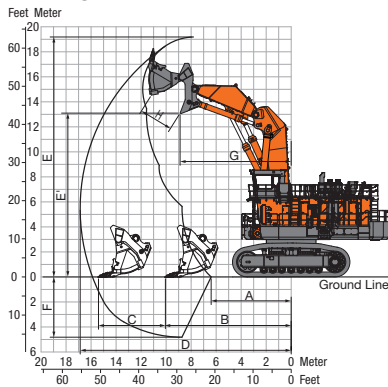


A:	Minimum Digging Distance	6 400 mm (21 ft.)
B:	Minimum Level Crowding Distance	10 500 mm (33 ft.)
C:	Level Crowding Distance	5 350 mm (17 ft. 7 in.)
D:	Maximum Digging Reach	17 000 mm (55 ft. 9 in.)
E:	Maximum Cutting Height	19 200 mm (63 ft.)
E:	Maximum Dumping Height	13 100 mm (43 ft.)
F:	Maximum Digging Depth	4 800 mm (15 ft. 9 in.)
G:	Working Radius at Maximum Dumping Height	8 900 mm (29 ft. 2 in.)
H:	Maximum Bucket Opening Width	2 700 mm (8 ft. 10 in.)

### Backhoe

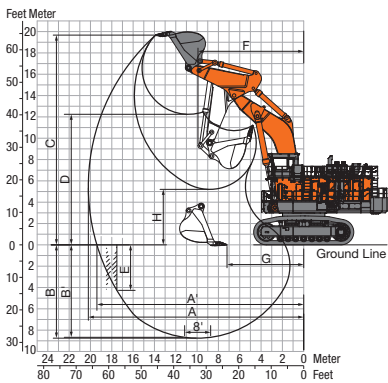

A:	Maximum Digging Reach	20 200 mm (66 ft. 3 in.)
A:	Maximum Digging Reach (on ground)	19 400 mm (63 ft. 8 in.)
B:	Maximum Digging Depth	8 800 mm (28 ft. 11 in.)
B:	Maximum Digging Depth (3° level)	8 700 mm (28 ft. 7 in.)
C:	Maximum Cutting Height	19 700 mm (64 ft. 8 in.)
D:	Maximum Dumping Height	12 200 mm (40 ft.)
E:	Maximum Vertical Wall	4 300 mm (14 ft. 1 in.)
F:	Minimum Swing Radius	9 900 mm (32 ft. 6 in.)
G:	Minimum Level Crowding Distance	7 200 mm (23 ft. 8 in.)
H:	Minimum Dumping Height	5 200 mm (17.1 ft.)

## DIMENSIONS

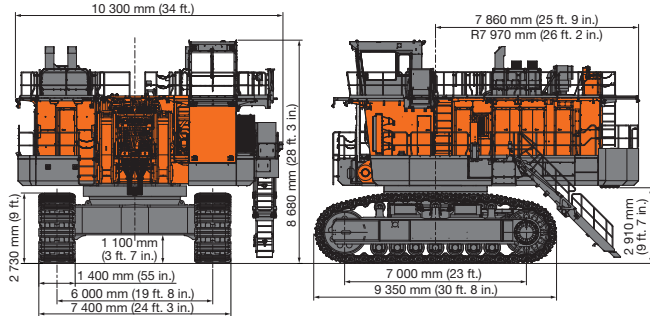

## PASS MATCH

Best match: 4-6 passes

Potential match: 3-8 passes

Model	Bucket capacity*	100 t class truck	EH3500AC-3	EH4000AC-3	EH5000AC-3
EX3600-7	BH 22.0 m <sup>3</sup> (28.8 cu. yd.)	3	5	6	8
	LD 22.0 m <sup>3</sup> (28.8 cu. yd.)	3	5	7	
EX5600-7	BH 34.0 m <sup>3</sup> (44.5 cu. yd.)		3	4	5
	LD 29.0 m <sup>3</sup> (38.0 cu. yd.)		4	5	7
EX8000-7	BH 43.0 m <sup>3</sup> (56.2 cu. yd.)			3	4
	LD 40.0 m <sup>3</sup> (52.3 cu. yd.)		3	4	5

Note: \* ISO heaped  
Best match

## ENVIRONMENT

Auto control air conditioner contains fluorinated greenhouse gases , Refrigerant type: HFC-134a, GWP: 1 430, Amount: 2.85 kg (6.3 lb.), CO2e: 4.08 tonnes (4.50 tons)

## UPPERSTRUCTURE

Swing speed	3.3 min <sup>-1</sup> (rpm)
Fuel tank capacity	11 300 L (2,486 gal)
DEF tank capacity	356 L (78.3 gal)

(Cummins T4F / EU Stage V only)

## HYDRAULIC SYSTEM

Main pumps	12 variable-displacement, axial piston pumps for front attachment, travel and swing
Pressure setting	29.4 MPa (300 kgf/cm <sup>2</sup> , 4,264 psi)
Max. oil flow	8 x 375 L/min (8 x 99.1 gal/min), 4 x 425 L/min (4 x 112.3 gal/min)

## UNDERCARRIAGE

Travel speeds	High: 0 to 2.3 km/h (0 to 1.4 mph) Low: 0 to 1.6 km/h (0 to 1.0 mph)
Maximum traction force	2 230 kN (227,000 kgf, 501,324 lbf)

## WEIGHTS AND GROUND PRESSURE

### Loading Shovel

Equipped with 29 m<sup>3</sup> (38 cu. yd.) (ISO 7546 Heaped 2:1) bottom dump bucket

Shoe width	Weight	Ground pressure
1 400 mm (55 in.)	544 000 kg (1,199,315 lb.)	244 kPa (2.49 kgf/cm <sup>2</sup> , 35.4 psi)

### Backhoe

Equipped with 34 m<sup>3</sup> (44.5 cu. yd.) (ISO 7451:2007) bucket

Shoe width	Weight	Ground pressure
1 400 mm (55 in.)	549 000 kg (1,210,338 lb.)	246 kPa (2.51 kgf/cm <sup>2</sup> , 35.7 psi)

Cummins T4F configuration

## ATTACHMENTS

### Loading Shovel

#### Bucket Capacity (ISO 7546 Heaped 2:1)

27.0 m<sup>3</sup> (35.3 cu. yd.) : Material density 1 800 kg/m<sup>3</sup> (3,034 lb./cu. yd.) or less  
29.0 m<sup>3</sup> (38 cu. yd.) : Material density 1 800 kg/m<sup>3</sup> (3,034 lb./cu. yd.) or less  
31.5 m<sup>3</sup> (40.5 cu. yd.) : Material density 1 600 kg/m<sup>3</sup> (2,697 lb./cu. yd.) or less

### Backhoe

#### Bucket Capacity (ISO 7451:2007)

34.0 m<sup>3</sup> (44.5 cu. yd.) : Material density 1 800 kg/m<sup>3</sup> (3,034 lb./cu. yd.) or less  
36.0 m<sup>3</sup> (47.1 cu. yd.) : Material density 1 800 kg/m<sup>3</sup> (3,034 lb./cu. yd.) or less  
38.5 m<sup>3</sup> (50.4 cu. yd.) : Material density 1 600 kg/m<sup>3</sup> (2,697 lb./cu. yd.) or less

## ENGINE

Model ..... Cummins QSKTA50-CE (FCO, T4F/EU Stage V)

Rated power @1 800 min<sup>-1</sup>(rpm)  
ISO 14396: 2002, gross... 2 x 1 119 kW (1 520 PS, 1 500 HP)

Piston displacement ..... 2 x 50 L (2 x 3,051 cu. in.)

Model ..... MTU 12V4000 C33R (FCO)

Rated power @1 800 min<sup>-1</sup>(rpm)  
ISO 14396: 2002, gross... 2 x 1 150 kW (1 563 PS, 1 542 HP)

Piston displacement ..... 2 x 57.2 L (2 x 3,491 cu. in.)

Model ..... MTU 12V4000 C15 (T4F/EU Stage V)

Rated power @1 800 min<sup>-1</sup>(rpm)  
ISO 14396: 2002, gross... 2 x 1 150 kW (1 563 PS, 1 542 HP)

Piston displacement ..... 2 x 57.2 L (2 x 3,491 cu. in.)

Before using a machine with a satellite communication system or telecommunication system, please make sure that the satellite communication system or telecommunication system complies with local regulations, safety standards and legal requirements. If not so, please make modifications accordingly.

These specifications are subject to change without notice. Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, and all standard equipment with some differences in color and features. Before use, read and understand the Operator's Manual for proper operation.